


TYPE A CURB & GUTTER

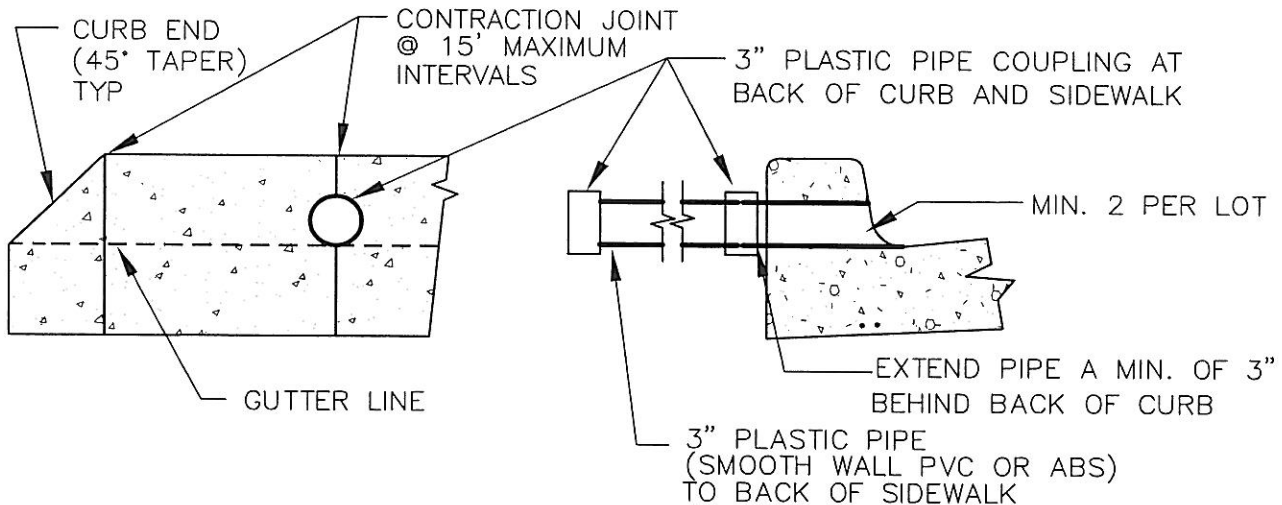

WEEP HOLE THROUGH CURB

NOTES:

1. CONTRACTION JOINTS SHALL BE PLACED AT 15' MIN. INTERVALS AND SHALL EXTEND AT LEAST 50% THROUGH THE CURB OR CURB AND GUTTER.
2. A CONTRACTION JOINT SHALL BE PLACED ALONG AND OVER WEEP HOLE THROUGH THE SIDEWALK.
3. ALL CONCRETE SHALL BE 3500 PSI @ 28 DAYS.
4. WHERE SIDEWALKS ARE TO BE CONSTRUCTED, EXTEND 3" PIPE TO BACK OF SIDEWALK LOCATION & INSTALL COUPLING.
5. INSTALL MIN. 2 WEEP HOLES ON ALL LOTS. ONE WEEP HOLE TO BE AT LOW POINT OF LOT, 5' FROM P/L. WEEPHOLES IN EXISTING CURBS SHALL BE CORE DRILLED.

LAST REVISION DATE: DEC 2004	COPYRIGHT 1996 WESTECH ENGINEERING INC.
<h3 style="margin: 0;">TYPE 'A'</h3> <h2 style="margin: 0;">CURB AND GUTTER AND WEEP HOLE</h2> <p style="margin: 0;">(NTS)</p>	
JUNCTION CITY, OR	DETAIL NO. 210