


**TYP. CROSS SECTION**

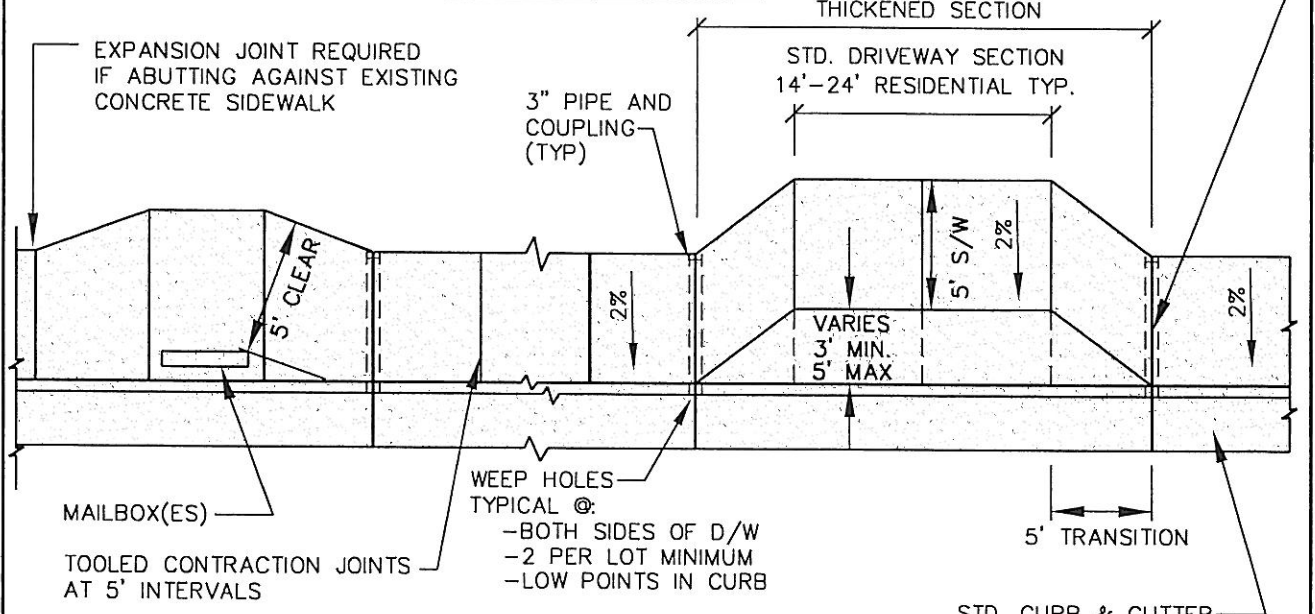

**TYP. PLAN VIEW**

- NOTES:**
1. CONCRETE DEPTH FOR STANDARD SIDEWALKS SHALL BE 4" MIN.
  2. DRIVEWAY SECTIONS INCLUDING SIDEWALKS THROUGH DRIVEWAYS SHALL BE 6" MIN. THICKNESS.
  3. SIDEWALKS 8' & WIDER SHALL HAVE A LONGITUDINAL CONTRACTION JOINT AT THE MIDPOINT.
  4. CONCRETE SHALL BE 3500 PSI @ 28 DAYS.
  5. PCC APRONS SHALL BE JOINTED TO MATCH SIDEWALK PATTERN.
  6. SIDEWALKS SHALL BE LOCATED ENTIRELY WITHIN RIGHT-OF-WAY OR SIDEWALK EASEMENTS, INCLUDING SIDEWALKS AT DRIVEWAY APRONS.

LAST REVISION DATE: <b>APRIL 2000</b>	<small>COPYRIGHT 1998 WESTECH ENGINEERING, INC.</small>
<h2 style="margin: 0;">CURBLINE SIDEWALKS AND DRIVEWAY APRONS</h2>	
CITY: <b>JUNCTION CITY, OR</b>	DRAWING NO. <span style="font-size: 1.5em; font-weight: bold;">212</span>