


PLACE 4" MIN. THICKNESS, CL.'C' A.C.  
 IN TWO EQUAL LIFTS, OR THICKNESS OF  
 REMOVED PAVEMENT,WHICHEVER IS GREATER,  
 TO 91% OPT. DENSITY PER  
 RICE STD. METHOD.

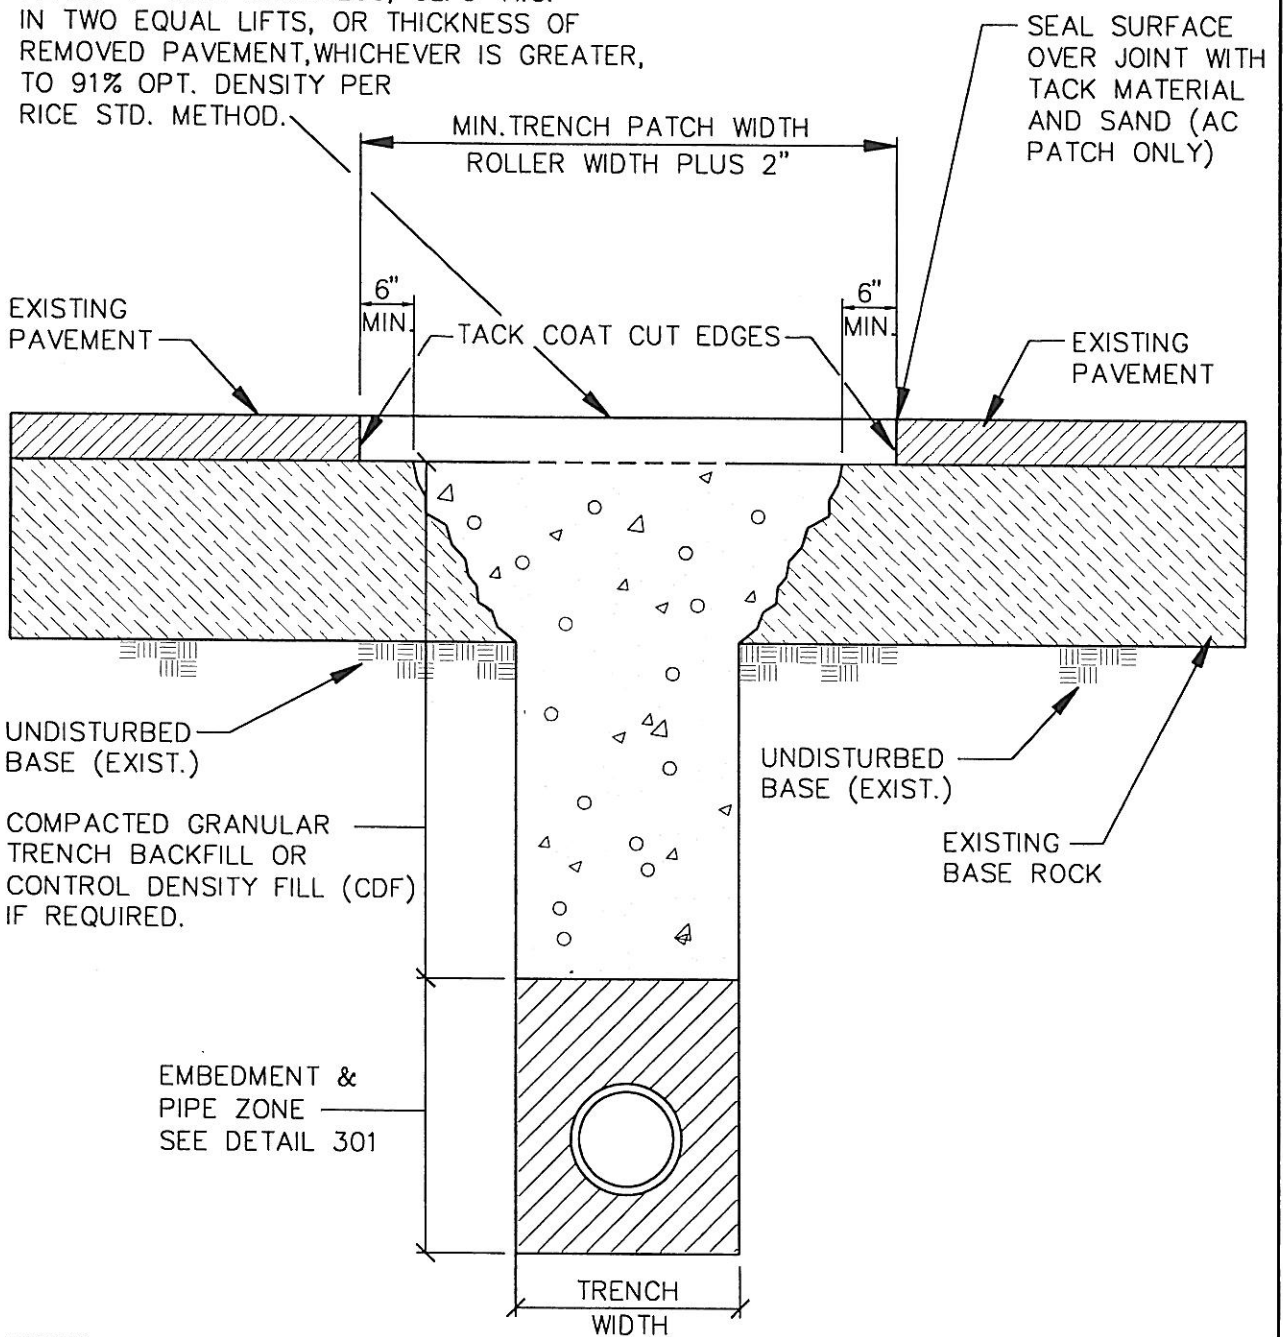

**NOTES:**

1. ALL EXISTING AC OR PCC PAVEMENT SHALL BE SAWCUT PRIOR TO REPAVING.
2. PCC CONCRETE PAVEMENT SHALL BE REPLACED WITH 3300 PSI PCC TO A MINIMUM THICKNESS OF 6" OR TO THE THICKNESS OF REMOVED CONCRETE, WHICHEVER IS GREATER.
3. FOR PAVED DRIVEWAYS, (EXCEPT COMMERCIAL OR INDUSTRIAL), PAVEMENT THICKNESS MAY BE REDUCED TO 3" IN 2 LIFTS, AND OVERCUT MAY BE REDUCED TO 3" EACH SIDE.

LAST REVISION DATE: JANUARY 1998	
<b>STREET CUT SURFACE RESTORATION</b>	
CITY: JUNCTION CITY, OR	DRAWING NO. <b>302</b>