


CLEANOUT COVERS: ALL SEWER CLEANOUT LIDS TO READ "SEWER"
 ALL STORM CLEANOUT LIDS TO READ "STORM" OR "C/O".

1. NON-TRAFFIC AREAS:
 CARSON MODEL 910 T-COVER OR EQUAL (GREEN FOR SEWER, GREY FOR STORM).
2. TRAFFIC AREAS, INCLUDING DRIVEWAYS:
 8" X 4" CAST IRON FRAME & COVER, OLYMPIC M1007 OR EQUAL.

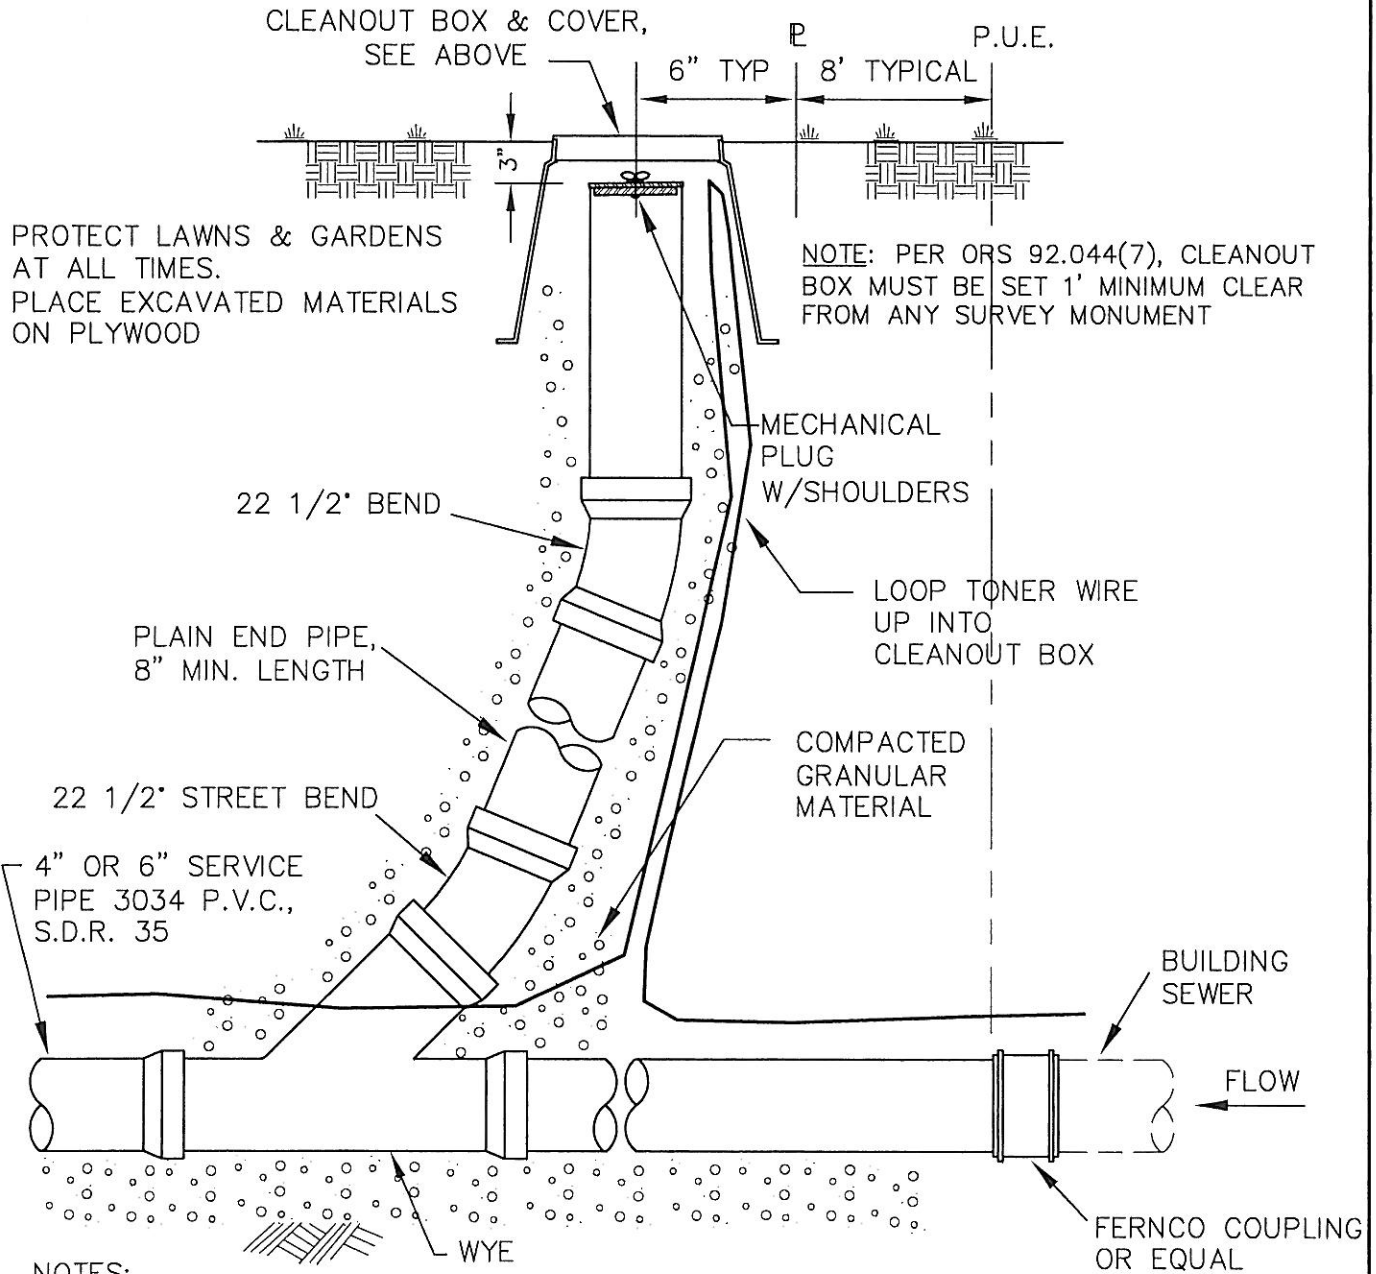

NOTES:

1. CLEANOUT RISER SHALL BE SAME SIZE AND MATERIAL AS LATERAL PIPE.
2. PROVIDE CASTING FOR CLEANOUTS LOCATED IN DRIVEWAYS.
3. CLEANOUT PIPE SHALL BE LEFT A MINIMUM OF 18" ABOVE EXISTING GRADE UNTIL ALL CURBING IS INSTALLED AND ALL PRIVATE UTILITY TRENCHES ARE BACKFILLED. CLEANOUTS SHALL THEN BE SET FLUSH WITH FINISH GRADE.

LAST REVISION DATE: MAR 2008	COPYRIGHT 1996 WESTECH ENGINEERING, INC.
STANDARD SERVICE LATERAL CLEANOUT	
(NTS)	
JUNCTION CITY, OR	DETAIL NO. 416